

DISMOUNTING & MOUNTING

2-SIDED HANDLE PANELS



DEDICATED TO
DRAFT QUALITY

DISMOUNTING

HOW TO REMOVE 2-SIDED HANDLE PANELS



Drill a small hole in the panel, 10 mm from the top of the handle.




Carefully press the panel out with a screwdriver (or similar).



Press out the second panel from the other side.

MOUNTING

HOW TO MOUNT NEW 2-SIDED HANDLE PANELS

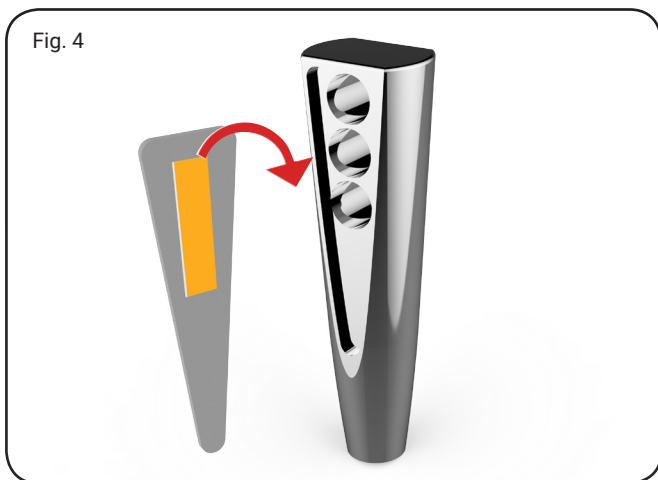

Remove the orange outer protection film from the double sided tape.



Press the glued side into the marked area on the handle. Repeat on the other side.



The handle is ready for use.

